
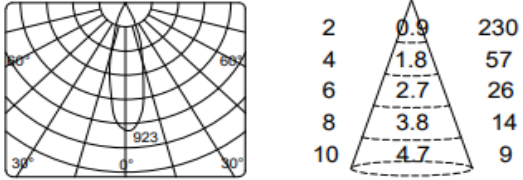



Product Image	Specification	
	Lamp Category	Floodlights
	Model	DP-FLA
	Power	3W
	Size	42*130mm
	Color	Silver Black
	Material	AL6063
	Weight	0.27kg
Light distribution curve	Photoelectric Properties	
	Light source	Langminas   OSRAM   CREE
	Luminous Efficiency	210lm
	Color Temperature	3000K
	Color Rendering Index	≥80
	Beam Angle	25°
	Input Voltage	24V DC
	Dimensional drawing	Lamp application description
<p>Unit: mm</p> 	Environment	Squares   Parks   Courtyards
	Operating temperature	-20°C~40°C
	Work life	50000H
	Control Model	Always on
	Projection Distance	5m
	Ingress Protection	IP67
Lamp characteristics		
<ol style="list-style-type: none"> <li>1. Adopt silicone rubber full structure waterproof design.</li> <li>2. The shape and structure of the lamp are simple, and the environmental applicability is strong.</li> <li>3. Round mounting base, you can adjust the installation angle of the lamp up and down.</li> <li>4. Optional hood anti-glare style, more humanized design.</li> <li>5. The light source cavity and the power cavity are isolated, the heat dissipation performance is better, and the service life of the lamp is effectively extended.</li> <li>6. Lamp body: imported high-quality AL6063 aluminum die-casting molding, excellent surface quality.</li> <li>7. Glass: high transmittance ultra-white glass tempered, light transmittance up to 92.</li> <li>8. Lens: ultra-high precision mold, optical acrylic material molding imported from Japan, light transmittance up to 93%.</li> <li>9. Surface treatment: high-quality outdoor special powder spraying, strong aging resistance.</li> <li>10. Fasteners: All fasteners on the lamp body are made of high-strength 316 stainless steel, which will never rust.</li> </ol>		