
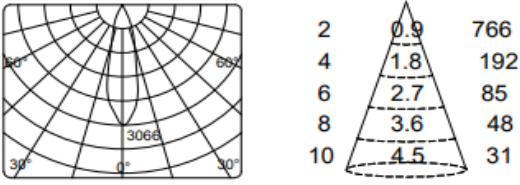



Product Image	Specification																
	Lamp Category	Floodlights															
	Model	DP-FLCF															
	Power	10W															
	Size	85*85mm															
	Color	Silver Black															
	Material	ADC12															
	Weight	0.58kg															
Light distribution curve	Photoelectric Properties																
 <table border="1" data-bbox="516 883 732 1067"> <tr><td>2</td><td>0.9</td><td>766</td></tr> <tr><td>4</td><td>1.8</td><td>192</td></tr> <tr><td>6</td><td>2.7</td><td>85</td></tr> <tr><td>8</td><td>3.6</td><td>48</td></tr> <tr><td>10</td><td>4.5</td><td>31</td></tr> </table>	2	0.9	766	4	1.8	192	6	2.7	85	8	3.6	48	10	4.5	31	Light source	Langminas OSRAM CREE
	2	0.9	766														
	4	1.8	192														
	6	2.7	85														
	8	3.6	48														
	10	4.5	31														
	Luminous Efficiency	740lm															
Color Temperature	3000K																
Color Rendering Index	≥80																
Beam Angle	25°																
Input Voltage	24V DC																
Dimensional drawing	Lamp application description																
<p>Unit:mm</p> 	Environment	Squares Parks Courtyards															
	Operating temperature	-20°C~40°C															
	Work life	50000H															
	Control Model	Always on															
	Projection Distance	5m															
	Ingress Protection	IP67															
Lamp characteristics																	
<ol style="list-style-type: none"> 1. Adopt silicone rubber full structure waterproof design. 2. The shape and structure of the lamp are simple, and the environmental applicability is strong. 3. Round mounting base, you can adjust the installation angle of the lamp up and down. 4. Optional hood anti-glare style, more humanized design. 5. The light source cavity and the power cavity are isolated, the heat dissipation performance is better, and the service life of the lamp is effectively extended. 6. Lamp body: imported high-quality ADC12 aluminum die-casting molding, excellent surface quality. 7. Glass: high transmittance ultra-white glass tempered, light transmittance up to 92. 8. Lens: ultra-high precision mold, optical acrylic material molding imported from Japan, light transmittance up to 93%. 9. Surface treatment: high-quality outdoor special powder spraying, strong aging resistance. 10. Fasteners: All fasteners on the lamp body are made of high-strength 316 stainless steel, which will never rust. 																	