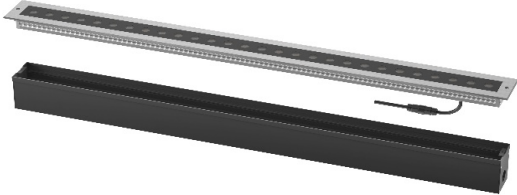
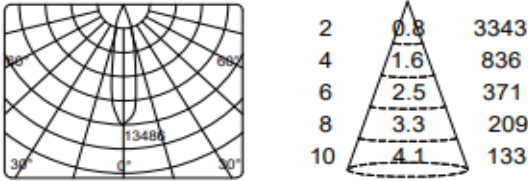
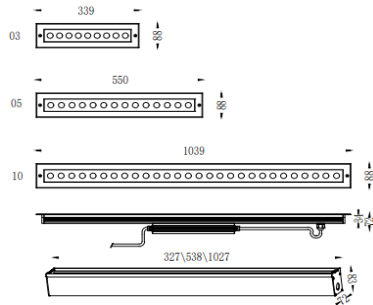


Product Image	Specification	
	Lamp Category	Buried lights
	Model	DP-ILFD
	Power	40W
	Size	1039*88*83mm
	Color	Silver gray
	Material	AL6063
	Weight	6.88kg
Light distribution curve	Photoelectric Properties	
	Light source	Langminas OSRAM CREE
	Luminous Efficiency	3200lm
	Color Temperature	3000K
	Color Rendering Index	≥80
	Beam Angle	35°
	Input Voltage	24V DC 220V AC
	Beam diameter (mm) vs Distance (m):	
2	0.8	3343
4	1.6	836
6	2.5	371
8	3.3	209
10	4.1	133
Dimensional drawing	Lamp application description	
	Environment	Squares Parks Courtyards
	Operating temperature	-20°C~40°C
	Work life	50000H
	Control Model	Always on
	Projection Distance	5-8m
	Ingress Protection	IP67
Lamp characteristics		
<ol style="list-style-type: none"> 1. Adopt silicone rubber full structure waterproof design. 2. The shape and structure of the lamp are simple, and the environmental applicability is strong. 3. Round mounting base, you can adjust the installation angle of the lamp up and down. 4. Optional hood anti-glare style, more humanized design. 5. The light source cavity and the power cavity are isolated, the heat dissipation performance is better, and the service life of the lamp is effectively extended. 6. Lamp body: imported high-quality AL6063 aluminum die-casting molding, excellent surface quality. 7. Glass: high transmittance ultra-white glass tempered, light transmittance up to 92. 8. Lens: ultra-high precision mold, optical acrylic material molding imported from Japan, light transmittance up to 93%. 9. Surface treatment: high-quality outdoor special powder spraying, strong aging resistance. 10. Fasteners: All fasteners on the lamp body are made of high-strength 316 stainless steel, which will never rust. 		